



3 POSITION SWITCH WITH INTEGRATED KILL WIRING TIPS



WIRE COLOR KEY:

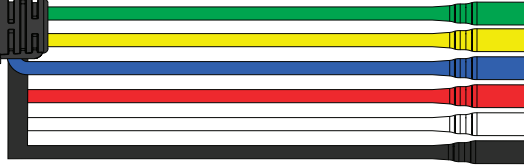

GREEN	- ON on LOW	- OFF on HIGH
YELLOW	- OFF on LOW	- ON on HIGH
BLUE	- ON on LOW	- ON on HIGH
RED	- 12 VOLTS INPUT (POWER)	
WHITE	- KILL SWITCH POWER	
BLACK	- KILL SWITCH GROUND	

HOW TO:

1) Enable Kill Switch:

Remove old kill switch and splice to those wires. Otherwise, tap White wire into power wire running between the CDI and ignition coil and hook Black wire to frame ground (or negative terminal on battery).

2) Run lights on "Low", and Grip Heaters on "High":

Hook the light's power wire to Blue and ground wire to frame. Hook grip heater power wires to Yellow and ground wires to frame.

3) Run grip heaters on "Low", and lights/grip heaters on "High":

Hook grip heater power wires to Blue and ground wires to frame. Hook light's power wire to Yellow and ground wire to frame.

4) Run more than one light:

To wire two lights to turn on and off together, Y-crimp the wires together and hook them up as described above.



Use a Trail Tech Crimp Kit for a Professional Installation. P/N: HT230C